

Product Features

1. Reliable seam sealed ceramic package
2. Wide operating temperature range
3. Superior performance and stringent reliability in harsh environment
4. AEC-Q200 Compliant
5. RoHS and REACH Compliant , Pb-free , Halogen-free
6. Industry Standard Package :
2.05*1.65*0.5 mm (AY Series)

Application :

- Automotive Wireless Communication
- In-Vehicle Infotainment system
- Camera , Radar , Lidar , TPMS , Smart Key
- Battery Management System , Body Control
- Power steering , Breaking System , Engine Control



Test condition

Ambient temperature : $25 \pm 5^{\circ}\text{C}$


Relative humidity : 40% ~ 70%

● Table 1 . Electrical Specifications

Parameters	Symbol	Min.	Typ.	Max.	Units	Notes
Nominal Frequency	F	16 ~ 60			MHz	
Frequency Tolerance	FT	± 10			ppm	@ $25^{\circ}\text{C} \pm 3^{\circ}\text{C}$
Frequency Stability Over Operating Temp. Range (Reference 25°C)	ST	± 15			ppm	@ $-40 \sim 85^{\circ}\text{C}$
		± 30				@ $-40 \sim 105^{\circ}\text{C}$
		± 50				@ $-40 \sim 125^{\circ}\text{C}$
Operating Temperature	Topr	-40	25	125	$^{\circ}\text{C}$	
Load Capacitance	CL	8 , 10 , 12 or specify			pF	
Drive Level	DL	-	100	200	μW	
Equivalent Series Resistance	ESR	-	-	180	Ohm	16~20MHz
		-	-	100		20~30MHz
		-	-	60		30~40MHz
		-	-	40		40~60MHz
Aging	-	± 3			ppm	1st Year
		± 15				15th Year

Note : The table shows common spec. if you have special spec. requirement , please feel free to contact our salesperson.

● Dimensions

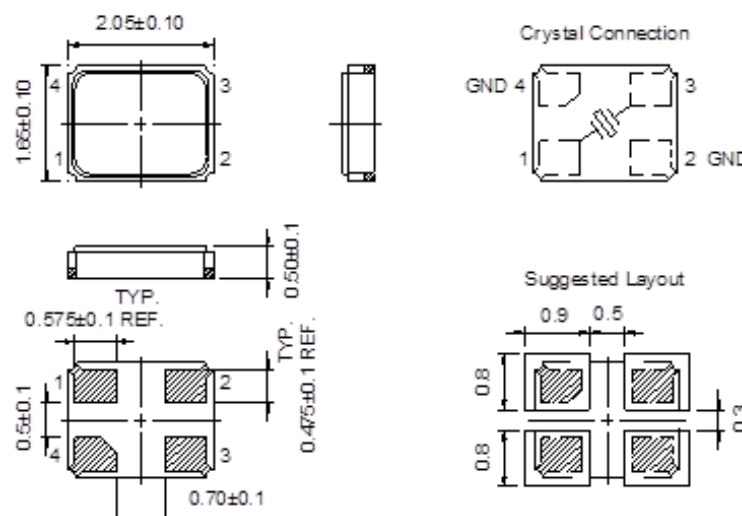

(Unit : mm)